

JITC Certified ConferenceManager™ 5v



KEY BENEFITS

- **Defense Switch Network (DSN)**
Certified for use on all Defense Switch Network Switching Systems
- **Virtual Delivery Option**
Certified and available as a virtual solution or on our 1U Intel® server
- **TLS & SRTP Support**
Encryption via native TLS & SRTP support
- **Call Management**
Operator and Audio Console for assisted and unassisted call management
- **Active Directory**
Active Directory and Public Key Infrastructure (PKI) support
- **Blast Dial Conferencing**
Dedicated line to quickly connect key personnel in the event of an emergency

Virtualized JITC Communications

Delivering Seamless and Secure Mission Critical Conferencing

The JITC-certified ConferenceManager5v (CM5v) system is a state-of-the-art audio collaboration platform engineered to deliver a highly secure, comprehensive, audio conferencing solution for the Department of Defense. The system is compatible with all APL-listed voice switches and offers unmatched operational flexibility, supporting ad-hoc and scheduled conferences as well as pre-set blast dial sessions.

The ConferenceManager5V has been certified by the Defense Information Systems Agency (DISA) Joint Interoperability Test Command (JITC) Certification testing and is listed on the Department of Defense (DoD) Unified Capabilities Approved Products Listing (APL) Accreditation.

VIRTUAL SPECIFICATIONS

250 PORTS

vCPU: 4 cores, 3.5+ GHz
vRAM: 16 GB
vDisk: 1TB
vNIC: 1 or 2 NICs, 1G, or 10G Links

500 PORTS

vCPU: 8 cores, 3.5+ GHz
vRAM: 32 GB
vDisk: 1TB
vNIC: 1 or 2 NICs, 1G, or 10G Links

*CM5v is not supported on VM hosts that are oversubscribed, due to the real-time nature of the application.

DELL® SERVER SPECIFICATIONS

If you choose to deploy the ConferenceManager5v on the Compunetix-provided server, please see the specifications below:

KEY FEATURES

Dell PowerEdge R360XE (1U)
Intel Xeon 6, 4C/8T, 3.5GHz Turbo,
5.2GHz Processor
16GB DDR5-5600 ECC UDIMM
2666Mhz RAM
Dual 1GbE LOM
Riser Config 2, Butterfly Gen4 Riser
(x8/x8)
2x 960GB SATA SSD (Hot-plug)
RAID 1 (PERC H355) and redundant
power (standard)
System Capacity - 512 ports per
server
iDRAC9 Basic

MOTHERBOARD

Dell PowerEdge R360 Board

POWER SUPPLY

Dual 600W Hot-Plug PSUs

AC Voltage:

100-220 V, 50/60Hz
90-132 V- 12 amps
180-264 V- 6 amps

Draw:

Server off .8 amps/82.4 Watts @ 110V
Initial Power On 2.25 amps/247 Watts
@110V
Steady state 1.5 amps/165 Watts @
110V
Server powered off .4 amps/82.4
Watts @ 206V
Initial Power On 1.2 amps/247 Watts
@206V
Steady state .8 amps/165 Watts
@206V

Environmental:

560 BTU/Hour total

SYSTEM COOLING

Fans:

Standard system fans

DIMENSIONS

Height:

1.75" (44.45mm)

Width:


(w/o Rails) 17.25" (439mm)
(w Rails) 19" (482.6mm)

Depth:

(w/o CMA) 28" (712mm)
(w CMA) 33.25" (843.3 mm)

Gross Weight:

30 lbs (13.61kg)

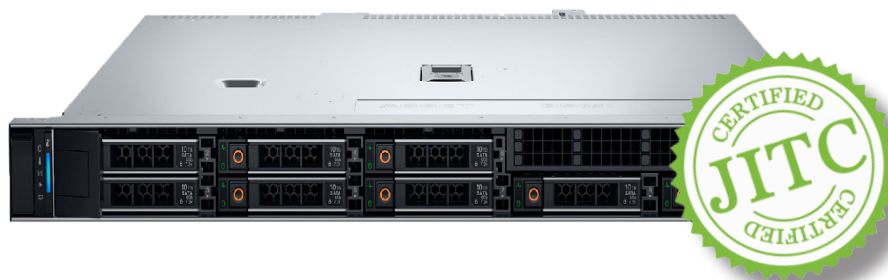

compunetix
the technology of cooperation

2025 ©Compunetix, Inc. Reproduction in whole or in part without written permission is prohibited. All rights reserved. Features and specifications are subject to change without notice.

Compunetix

2420 Mosside Boulevard
Monroeville, PA 15146
USA



info@compunetix.com



1.800.879.4266 or +1 412.373.8110



www.compunetix.com